

NOTES ON CONSTRUCTION

THE NOTES AND SPECIFICATIONS, GIVEN IN THIS DRAWING ARE APPLICABLE TO ALL STRUCTURAL DRAWINGS ALONG WITH RELEVANT SPECIFICATIONS AND CONDITIONS OF THE CONTRACT DOCUMENTS AS APPROPRIATE. IN CASE OF APPARENT AMBIGUITY OR DISCREPANCY BETWEEN THE FOLLOWING NOTES AND SPECIFICATIONS, THE DETAILED DRAWINGS AND CONTRACT DOCUMENTS, SEEK CLARIFICATIONS FROM THE ENGINEER-IN-CHARGE.

1.00 GENERAL

- 1.01 ALL DIMENSIONS ARE IN SI UNITS.
- 1.02 WORK TO FIGURED DIMENSIONS AND DO NOT SCALE THE DRAWING.
- 1.03 ALL STRUCTURAL DRAWINGS SHALL BE READ IN CONJUNCTION WITH RELEVANT ARCHITECTURAL AND SERVICE DRAWINGS.
- 1.04 DIMENSIONS AND CONDITIONS MUST BE VERIFIED IN THE SITE. AND ANY DISCREPANCIES SHALL BE BROUGHT TO THE NOTICE OF THE STRUCTURAL DESIGN TEAM BEFORE PROCEEDING WITH THE AFFECTED PART OF THE WORK.
- 1.05 ALL LEVELS OF THE PROJECT REFERS TO ARCHITECTURAL DRAWING.
- 1.06 THE STRUCTURE IS DESIGNED FOR :
BASEMENT+G+1+TERRACE+HEAD ROOM & OHT FLOORS ONLY.
- 1.07 THE STRUCTURE IS DESIGNED TO BE SELF SUPPORTING AND STABLE AFTER THE BUILDING IS COMPLETE. IT IS THE CONTRACTORS RESPONSIBILITY TO DETERMINE ERECTION PROCEDURES AND SEQUENCE TO INSURE SAFETY OF THE BUILDING AND ITS COMPONENTS DURING ERECTION. THIS INCLUDES THE ADDITION OF NECESSARY SHORING, SHEETING, TEMPORARY BRACING, GUYS, OR TIE DOWNS.
- 1.08 PROPOSED CHANGES OR SUBSTITUTIONS TO STRUCTURAL DETAILS OR PLANS SHALL BE SUBMITTED TO THE DESIGN ENGINEER FOR REVIEW AND APPROVAL.
- 1.09 STRUCTURE IS CONVENTIONAL SYSTEM FROM FOUNDATION TO SUPER STRUCTURE.

2.00 SETTING OUT

- 2.01 FOR MAIN SETTING-OUT OF LINES AND LEVELS, REFER TO ARCHITECTURAL DRAWINGS.
- 2.02 ALL DIMENSIONS AND CONDITIONS MUST BE VERIFIED AT SITE BY CONCERNED ENGINEER AND ANY DISCREPANCIES NOTED IN STRUCTURAL DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE STRUCTURAL DESIGN TEAM BEFORE PROCEEDING WITH THE PORTION OF WORK INVOLVED.

3.00 ABBREVIATIONS

ARCH	= ARCHITECT/ARCHITECTURAL	N.T.S	= NOT TO SCALE
BOT	= BOTTOM	P.C.C	= PLAIN CEMENT CONCRETE
BW	= BOTH WAYS	QTY.	= QUANTITY
C/L/ ϕ	= CENTRE LINE	B1, B2,...	= FLOOR/ROOF BEAM MARKS
C1, C2,...	= COLUMN NUMBERS	R.C.C	= REINFORCED CEMENT CONCRETE
DET	= DETAILS	REF.	= REFER / REFERENCE
DIA, ϕ OR T=	= DIAMETER	REINF.	= REINFORCEMENT
DWG	= DRAWING	SEC	= SECTION
EF	= EACH FACE	SPEC.	= SPECIFICATION
ELE	= ELEVATION	SSL	= STRUCTURAL SLAB LEVEL
FF	= FAR FACE	STRPS	= STIRRUPS
F.F.L	= FINISHED FLOOR LEVEL	STR.	= STRUCTURE / STRUCTURAL
FLR.	= FLOOR	SYMM.	= SYMMETRICAL
GA	= GENERAL ARRANGEMENT	THK.	= THICK
HT.	= HEIGHT	TOB	= TOP OF BEAM
LVL.	= LEVEL	TOC	= TOP OF CONCRETE
M/m	= METRE	TOS	= TOP OF SLAB
MAX.	= MAXIMUM	TYP.	= TYPICAL
MIN.	= MINIMUM	UNO	= UNLESS NOTED OTHERWISE
MM / mm	= MILLIMETER	VERT.	= VERTICAL
NF	= NEAR FACE	@	= AT THE RATE OF
NO. / NOS =	= NUMBERS	W1, W2,.....	= WALL NUMBERS

4.00 EARTHWORKS AND FOUNDATIONS

(GENERAL INSTRUCTIONS IN ABSENCE OF ANY SPECIFIC DATA FROM SOIL / SHORING CONSULTANT)

- 4.01 WHEN EXCAVATING FOR FOUNDATIONS, CARE SHALL BE TAKEN NOT TO DISTURB THE STRATA UNDERLYING FORMATION LEVEL. IF ANY DISTURBANCE DOES OCCUR, OR IF SOFT SPOTS ARE ENCOUNTERED, THE MATERIAL SHALL BE REMOVED AND REPLACED BY SELECTED GRANULAR FILL. THE SOIL AT THE BASE OF EACH FOUNDATION SHALL BE COMPACTED TO ENSURE THAT ITS DRY DENSITY IS AT LEAST 95% OF THE MODIFIED PROCTOR MAXIMUM DRY DENSITY.
- 4.02 FILL UNDER SLABS CAST ON GROUND AND OTHER STRUCTURAL ELEMENTS SHALL BE SELECTED GRANULAR FILL LAID IN 150mm. LAYERS AND MECHANICALLY COMPACTED TO THE APPROVAL OF THE QST ENGINEER INCHARGE.
- 4.03 ALL GRADE SLABS ARE NON STRUCTURAL AND MAY LEAD TO CRACK /UPLIFT IF PROPER BASE COARSE AND PROPER WATER PRESSURE RELIVING SYSTEM IS NOT PROVIDED. PLUMBING SERVICES TO BE PROVIDE NECESSARY DETAILS.

- 4.04 IT SHALL REMAIN THE EXECUTION/SITE ENGINEER OBLIGATION TO PROVIDE DRY WORKING CONDITIONS BY ANY MEANS HE MIGHT SEE EFFECTIVE. EXCAVATION SHALL BE AT ALL TIMES CARRIED OUT IN DRY CONDITIONS. GROUND WATER SHALL BE MAINTAINED AT LEAST 500mm BELOW THE DEEPEST POINT IN THE EXCAVATION WHILE IT REMAINS OPEN. THE DEWATERING SYSTEM USED SHALL NOT AFFECT THE EXISTING ADJACENT BUILDINGS IN ANY WAY. PROPER DEWATERING SYSTEM SHALL BE DESIGNED BY SERVICES TEAM IN ORDER TO ENSURE DRY CONDITION AT SITE DURING EXECUTION PROCESS.
- 4.05 ALL BACKFILLING SHALL BE COMPACTED TO AT LEAST 95% TO ITS MAXIMUM DENSITY AND IN ACCORDANCE WITH THE SPECIFICATIONS.
- 4.06 PROPER SHORT TERM / LONG TERM PRECAUTIONARY MEASURES INCLUDING SHORING, STRUTTING, BRACING SHALL BE PROVIDED FOR EXCAVATION TO BASEMENT ADJOINING THE NEIGHBORING STRUCTURES TO HOLD EARTH WHERE REQUIRED 100 THICK BINDING AND 150 THICK SOLING WITH SAND CUSHION SHALL BE PROVIDED UNDER RAFT.INDEPENDENT AND COMBINED FOOTINGS IF REQUIRED DEWATERING SHALL BE DONE BY PROVIDING SUMPS DEEPER THAN THE GENERAL EXCAVATION FOR RAFT BUT BEYOND THE BUILDING LINES.
- 4.07 REFER SEPARATE GENERAL EXCAVATION DRAWING AND SOIL C O N S U L T A N T I N P U T S F O R E A R T H W O R K .
- 4.08 ALL ABOVE MEASURES TO BE BROUGHT TO THE NOTICE OF SOIL CONSULTANTS FOR APPROVAL BEFORE EXECUTION.
- 4.09 REFER SOIL REPORT BY "BORE TECH SERVICES" AND FOR OTHER RELEVANT INFORMATION ON EXCAVATION / SHORING, REFER SHORING DRAWINGS BY EXTERNAL CONSULTANT.
- 4.10 UNLESS OTHERWISE NOTED, 100 THK. PCC WITH CUBE STRENGTH OF M10 N/MM2 SHALL BE PROVIDED ON ALL SOIL SURFACES FORMING THE BASE FOR STRUCTURAL CONCRETE MEMBERS.
- 4.11 FOR EXCAVATION BELOW GROUND WITH WATER SEEPAGES, DEWATERING SHALL BE DONE TO KEEP THE EXCAVATION PIT ADEQUATELY DRY DURING FORMING AND CASTING THE FOUNDATION.

5.00 BASEMENT CONSTRUCTION AND DEWATERING

- 5.01 IN ORDER TO AVOID FLOATATION, DEWATERING SHALL BE REDUCED ONLY AS THE SUPERSTRUCTURE WEIGHT INCREASES. UNLESS IT CAN BE SHOWN OTHERWISE BY THE CONTRACTOR, THE GROUNDWATER LEVELS SHALL BE MAINTAINED DURING THE CONSTRUCTION AT BELOW THE SOFFIT OF THE FOUNDATION. THE DEWATERING SYSTEM MAY BE REMOVED ONCE THE CONSTRUCTION OF THE STRUCTURE IS COMPLETED.
- 5.02 BACKFILLING WITH SELECTED EARTH BEHIND RETAINING WALLS SHALL BEGIN ONLY AFTER THE CONSTRUCTION OF GROUND FLOOR SLAB AND AS APPROVED BY THE ENGINEER.
- 5.03 ANY MAJOR ISSUES RELATED TO DEWATERING SHALL BE BROUGHT TO THE NOTICE OF THE SOIL / SHORING CONSULTANTS AND ALL OTHER PROJECT STAKE HOLDERS BEFORE EXECUTION.
- 6.00 SOIL DATA & WATER TABLE
- 6.01. ALLOWABLE SOIL BEARING CAPACITY OF THE SOIL IS TAKEN AS AS PER SOIL EXPLORATION REPORT NO: S-2246/2022-23/GFR/VER.4 BY "SARATHY GEOTECH & ENGINEERING SERVICES PVT. LTD"
- 6.02. MINIMUM DEPTH OF INFORMATION SHALL BE AS PER EXCAVATION DRAWING.

7.00 DESIGN LOADS

- 7.01 IN ADDITION TO SELF WEIGHT OF STRUCTURE THE FOLLOWING IMPOSED LOADS HAVE BEEN CONSIDERED IN THE DESIGN.

Sl. No.	OCCUPANCY DESCRIPTION	DISTRIBUTED LIVE LOAD (KN/sq.m)
1.	ROOMS	5.00
2.	STAIRCASE, CORRIDOR, BALCONIES	3.00
3.	MULTI PURPOSE HALL	5.00
4.	GYM ROOM/HALL	5.00
3.	SEISMIC DATA (AS PER IS 1893 :2016): a) ZONE - II b) ZONE FACTOR - 0.1 c) IMPORTANCE FACTOR (I) - 1.2 d) RESPONSE REDUCTION FACTOR (R) - 3	

- 7.02 a. BLOCK WORK - MAXIMUM DENSITY OF THE AAC BRICKS CONSIDERED - 6KN/M³ (AS APPLICABLE)
b. BLOCK WORK - MAXIMUM DENSITY OF THE HOLLOW BRICKS CONSIDERED - 14KN/M³ (AS APPLICABLE)
c. BLOCK WORK - MAXIMUM DENSITY OF THE SOLID BRICKS CONSIDERED - 18KN/M³ (AS APPLICABLE)
- 7.03 AT NO STAGE DURING OR AFTER CONSTRUCTION SHALL THE IMPOSED LOADS EXCEED THE ABOVE LIMITS, EXCEPT WHERE TEMPORARY ADDITIONAL SUPPORTS HAVE BEEN PERMITTED TO EFFECTIVELY TAKE INTO ACCOUNT THE EFFECT OF TEMPORARY EXCESSIVE LOADING DURING CONSTRUCTION. CONSTRUCTION VEHICLES SHALL NOT BE ALLOWED TO RUN ON PODIUM / ANY OTHER PART OF THE STRUCTURE UNLESS OTHERWISE PRIOR WRITTEN APPROVAL OBTAINED FROM DEIGN CONSULTANT.

8.00 CONCRETE

- 8.01 MAXIMUM SIZE OF AGGREGATE SHALL BE AS PER MIX DESIGN, HOWEVER PREFERABLY BE 20mm DOWNSIZE AND SHALL BE GRADED.
- 8.02 PLAIN CEMENT CONCRETE OF MINIMUM M10 GRADE SHALL BE USED.
- 8.03 MINIMUM CEMENT CONTENT SHALL BE AS PER INDIAN STANDARD CODES WITH RESPECT TO DIFFERENT GRADES OF CONCRETE.
- 8.04 REPLACEMENT OF CEMENT WITH FLY ASH / GGBS SHALL BE LIMITED TO 30%.
- 8.05 MAXIMUM FREE WATER CEMENT RATIO - 0.45
- 8.06 MINIMUM GRADE OF CONCRETE FOR ALL STRUCTURAL MEMBERS- M30 OR SPECIFIC ELEMENT DESIGN REQUIREMENT WHICHEVER IS HIGHER.
- 9.00 REINFORCEMENT
- 9.01 ADEQUATE CHAIRS AND PINS SHALL BE PROVIDED TO KEEP THE REINFORCEMENT IN ITS POSITION. SPACERS OR CHAIRS SHOULD BE PLACED AT A MAXIMUM SPACING OF 1M. COVER BLOCKS SHALL BE OF CONCRETE OF SAME STRENGTH OR PVC.
- 9.02 GRADE OF REBAR - FE500.

10.00 MATERIALS

- 10.01 ALL MATERIALS USED IN THE PERMANENT WORKS SHALL CONFORM TO SPECIFICATIONS.
- 10.02 ALL STRUCTURAL CONCRETE SHALL BE OF AN APPROVED MIX DESIGN PROPORTIONED TO ACHIEVE A STRENGTH AT 28 DAYS AS SPECIFIED IN THE APPROPRIATE DRAWING AND ALL REINFORCING STEEL SHALL BE HIGH YIELD STRENGTH DEFORMED BARS, FREE FROM OIL, SCALE, AND RUST OF GRADE AS SPECIFIED IN THE RESPECTIVE DRAWINGS.
- 10.03 RCC MATERIALS AND BRICK WALLS OF NOT LESS THAN TWO HOURS FIRE RESISTANCE SHOULD BE USED FOR THE CONSTRUCTION OF STRUCTURES. ONLY FIRE RESISTANT MATERIALS OR MATERIALS TREATED WITH FIRE RETARDANT CHEMICALS. SHOULD BE USED FOR INTERIOR DECORATION THE FIXED FIRE FIGHTING SYSTEMS LIKE SPRINKLERS/RISERS ETC., SHOULD NOT BE COVERED OR SHIFTED FROM THEIR ORIGINAL LOCATION.
- 10.04 QST TEAM TO CONFIRM ON THE MATERIAL & PRECAST /RCC SECTIONS & STRUCTURAL STELL SECTIONS. REINFORCEMENT OR ANY OTHER MATERIALS AS APPLICABLE TO THE PROJECT ETC., WITH DIFFERENT STEEL AND CONCRETE GRADES TESTING TO BE DONE AS PER RELEVANT CODES BEFORE START OF THE CONSTRUCTION FOR ANY PART / PORTION OR COMPLETE PROJECT.
- 10.05 CONCRETE SHALL BE PLACED AND CURED ACCORDING TO RELAVANT INDIAN STANDARDS AND SPECIFICATIONS. SUBMIT PROPOSED MIX DESIGN WIH RECENT SITE CUBE OR LAB TESTS FOR REVIEW PRIOR TO USE.
- 10.06 AT JUNCTIONS OF TWO DIFFERENT MEMBERS WITH DIFFERENT GRADES, HIGHER GRADE CONCRETE SHALL BE POURED.
- 10.07 TWO DIFFERENT RMC PUMPS SHALL BE USED WHILE CONCRETE VARIED WITH TWO DIFFERENT GRADES.
- 10.08 MAXIMUM TIME ALLOWED FROM THE TIME THE MIXING WATER IS ADDED UNTIL IT DEPOSITED IN ITS FINAL POSITION SHALL NOT EXCEED TWO HOURS. HOWEVER, LONGER PERIOD MAY BE PERMITTED IF ADMIXTURES ARE USUD CAREFULLY FOR EXTRA SLUMP RETENTION OR IN COOL HUMID WEATHER OR WHEN CHILLED CONCRETE PRODUCED.
- 10.07 AN INDEPENDENT TESTING LABORATORY SHALL PERFORM THE FOLLOWING TEST CAST IN PLACE CONCRETE:

A SLUMP OF PORTLAND CEMENT CONCRETE.

A CUBE COMPRESSIVE STRENGTH SHALL BE CONDUCTED FOR EACH GRADE FOR EVERY 50 M³ OR PART THEREOF PLACED PER DAY. REQUIRED CUBE(S) SAMPLE QUANTITIES AND TEST AGE AS FOLLOWS:

- 1 SAMPLE AT 3 DAYS
- 1 SAMPLE AT 7 DAYS
- 1 SAMPLE AT 28 DAYS

ONE ADDITIONAL RESERVE CUBES SHALL BE TESTED UNDER THE DIRECTION OF THE ENGINEER, IF REQUIRED.

MEAN STRENGTH DETERMINED FROM ANY GROUP OF FOUR CONSECUTIVE TEST RESULTS SHOULD BE GREATER OF

Fck + 0.825 x ESTABLISHED STANDARD DEVIATION

Fck + 4 N/mm2

* RMC VENDOR SHOULD ACHIEVE TARGET MEAN STRENGTH VALUE OF

Fck + 1.65 x STANDARD DEVIATION

Fck + 8 N/mm2

IN CASE OF ANY DISCREPANCY IN QUALITY OF CONCRETE DELIVERED TO SITE BY RMC VENDOR. CUBE STRENGTH ARRIVED AT SITE WITH PROPER QUALITY PROCESS SHALL BE CONSIDERED AS FINAL FOR ASSESSING CONCRETE STRENGTH

BASIC DATA REQUIRED FROM RMC VENDOR AND TO BE VERIFIED WITH STRUCTURAL ENGINEER (SAMPLE FORMAT).

1	Type of Cement	: OPC 53 Grade
2	Specific Gravity of Cement	: 3.15
3	Source of GGBS	: Bellary
4	Specific Gravity of GGBS	: 2.89
5	Desired workability at site	: 110 +/- 25mm
6	Minimum Cement Content	: As per IS 456-2000
7	Nominal Size of Aggregate	: 20mm
8	Type of Fine aggregate	: M.Sand/(zone II)
9	Source of Fine aggregate	: Hosur/Chikkaballapur
10	Specific gravity of Fine aggregate(MS)	: 2.54
11	Water Absorption of Fine Aggregate(MS)	: 3.84%
12	Type of Coarse Aggregate	: Crushed Granite Rock(Angular)
13	Source of coarse aggregate	: Hosur/Chikkaballapur
14	Size of Coarse Aggregate(Type I)	: 20mm
15	Specific gravity of coarse aggregate(20mm)	: 2.64
16	Water Absorption of Coarse Aggregate (Type I)	: 0.37%
17	Size of Coarse Aggregate(Type II)	: 12.5mm
18	Specific gravity of coarse aggregate(12mm)	: 2.62
19	Water Absorption of Coarse Aggregate (Type II)	: 0.60%
20	Type of Exposure	: Mild,Moderate
21	Degree of Quality control	: Good
22	Admixture	: Cflow 151
23	Make of Admixture	: CBS
24	Chloride Content in Admixture	: Nil

Grade→	M7.5	M10	M15	M20	M25	M30	M35	M40	Tolerance%
Ingredients ↓									
Units→	in Kg	in Kg	in Kg	in Kg	in Kg	in Kg	in Kg	in Kg	
Cement	90	110	135	150	190	252	280	380	As per IS 4926-2003
GGBS	90	110	135	150	130	108	120	60	
20mm	670	677	653	662	654	650	648	661	
12mm	447	451	436	441	436	433	432	440	
Fine aggregate	956	928	860	837	827	789	755	709	
Water	139	132	157	150	154	158	160	158	
Admixture%	0.4 to 0.9	0.4 to 0.9	0.4 to 0.9	0.4 to 0.9	0.4 to 0.9	0.4 to 0.9	0.4 to 0.9	0.4 to 0.9	
Density	2392	2408	2376	2390	2391	2390	2395	2408	
Mineral additive%	50.00	50.00	50.00	50.00	40.63	30.00	30.00	13.64	
W/B Ratio	0.77	0.60	0.58	0.50	0.48	0.44	0.40	0.36	
Target Mean Strength(MPA)	-	-	20.78	26.60	31.60	38.25	43.25	48.25	

- Remarks
1. Water correction is adopted for aggregate accordingly.
- 2.Aggregate proportions can be adjusted w.r.t gradation
- 3.Admixture dosage can be varied according to site conditions.
- 4.The sources of materials given above relate to current production.
- 5.Quantity of concrete is measured by yield test only .
- 6.As per IS 456:2000 (Page 29 clause 15.1.1) 28 days compressive strength shall alone be the criterion for acceptance or rejection of the concrete.
7. In general, Age Vs % of compressive strength is given below for the reference only.

3 days	50%
7 days	67%
28 days	100%


- 10.08 ALL THE MATERIALS TO BE TESTED WITH RESPECT TO STRENGTH, DURABILITY AND SERVICEABILITY CRITERIA CONFIRMING THEIR PHYSICAL PROPOSITIONS WITH RESPECT TO THE NECESSARY CODES BEFORE USING THE SAME IN RESPECTIVE PROJECTS.

11.00 FORMWORK

- 11.01 FORMWORK FOR CAST-IN-SITU OR PRECAST CONCRETE SHALL BE SO DESIGNED AND SUPPORTED APPROPRIATELY AS TO ENSURE MAINTAINING OF THE FORM OF CONCRETE TO SPECIFIED DIMENSIONS AND TO PREVENT LOSS OF SLURRY, CONTAMINATION OR ANY ADVERSE EFFECTS OF THE FORMWORK ON THE CONCRETE CONTAINED BY IT.
- 11.02 FORMWORK OR ITS SUPPORT SYSTEM SHALL BE EFFECTIVELY KEPT IN POSITION WITHOUT ANY MOVEMENT DURING AND AFTER PLACEMENT OF CONCRETE UNTIL THEY ARE READY TO BE RELEASED AFTER A SPECIFIED PERIOD.
- 11.03 PARTIALLY SET OR FULLY HARDENED CONCRETE SHALL NOT BE REPAIRED OR ALTERED IN FORM BY CHIPPING, CUTTING OR HACKING ETC.
- 11.04 STRIPPING OF FORMWORK SHALL BE AS PER IS 456 CLAUSE 11.3

12.00 CONCRETE COVER TO REINFORCEMENT

- 12.01 COVER TO REINFORCEMENT SHALL BE AS SPECIFIED IN TABLE 2 OF THIS DRAWING, WITH A TOLERANCE LIMIT EQUAL TO ONE-THIRD OF SPECIFIED COVER OR 5mm WHICHEVER IS LESS, PROVIDED THAT SUCH VARIATIONS DO NOT OCCUR FOR MORE THAN 10% OF THE NO. OF BARS AT ANY LOCATION/SECTION.
- 12.02 IN NO CASE SHALL THE CLEAR COVER BE LESS THAN THE DIAMETER OF THE BAR.

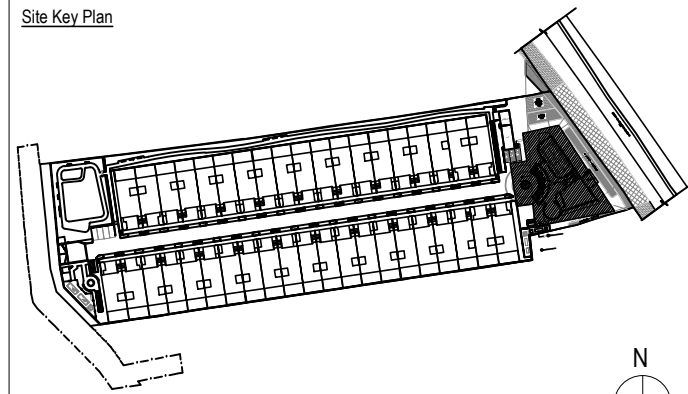

Key Plan: NTS

- General Notes
1. ALL DIMENSIONS AND LEVELS ON THE BUILDING SITE ARE TO BE CHECKED BEFORE COMMENCING WITH ANY WORK.
2. ANY DISCREPANCY IN THE DRAWINGS, DIMENSIONS & SPECIFICATIONS TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECTS AND RELEVANT PARTY PRIOR TO ANY WORK BEING STARTED.
3. ONLY FIGURED DIMENSIONS TO BE FOLLOWED - SCALED DIMENSIONS OF DRAWINGS WILL NOT BE PERMITTED.

Key / Additional Notes

1. READ THIS DRG. ALONG WITH GENERAL NOTES DWG. NO. SE-100(SHEET-1) & SE-100(SHEET-2)

Rev	Description	Date	Issued by
-----	-------------	------	-----------

SOBHA
SARAJAPUR-MARTHAHALLI OUTER RING ROAD
DEVARABISANAHALLI, BELANDUR POST BANGALORE-560103
TEL : (080) 49320000, E-mail: archtects@sobha.com

PROJECT

GALERA CLUB HOUSE

HUSKUR

TITLE

GENERAL NOTES

HEAD OF THE DEPARTMENT SRINIVAS SATHYANARAYAN				SHEET : 01 OF 02			
SIGN.....		SIGN.....		SIGN.....		SIGN.....	
DESIGNED SIGN..... SANTWANA	CHECKED SIGN..... RAVI BATHINA	DRAWN SIGN..... SANTHOSH KN	CHECKED SIGN..... RAVI BATHINA				
PROJECT CODE		RELEASED FOR		SCALE		SHEET	
436	FOR APPROVAL		AS NOTED	A1			
NORTH	DRAWING NO.		DATE	REVISION			
	SE/100		13-08-2025	R0			